

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB05/000902

International filing date: 08 March 2005 (08.03.2005)

Document type: Certified copy of priority document

Document details: Country/Office: GB  
Number: 0405170.2  
Filing date: 08 March 2004 (08.03.2004)

Date of receipt at the International Bureau: 28 June 2005 (28.06.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



GB 05 / 902



INVESTOR IN PEOPLE


The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

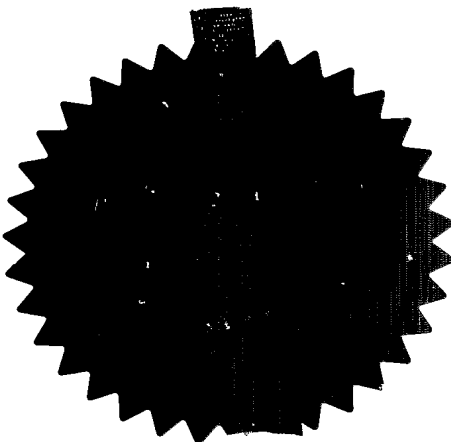


Signed

Dated 20 June 2005



Pat 1977

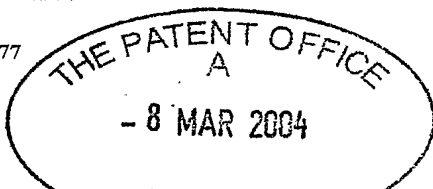

# The Patent Office

09HAR04 E879175-1 D01038  
P01/7700 0.00-0405170.2 CHEQUE

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

P104702GB/MPG/51699  
P2005001/67/FSEJ

2. Patent application number

(The Patent Office will fill in this part)

0405170.2 - 8 MAR 2004

3. Full name, address and postcode of the or of each applicant (underline all surnames)

ORECon Limited  
Unit 309  
Tamar Science Park  
1 Davy Road  
Derryford  
Plymouth  
Devon, PL6 8BX

8825051001

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

4. Title of the invention

Wave Energy Device

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

WITHERS & ROGERS

Goldings House  
2 Hays Lane  
London  
SE1 2HW

~~ORECon Ltd  
Unit 309  
Tamar Science Park  
1 Davy Rd  
Derryford  
Plymouth  
Devon PL6 8BX~~

*sim 10/6/05*  
*K.R. Bryer & Co.*  
*7, Gay Street,*  
*Bath, BA1 2PH.*

Patents ADP number (if you know it)

1077005 1776001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

a) any applicant named in part 3 is not an inventor, or  
b) there is an inventor who is not named as an applicant, or  
c) any named applicant is a corporate body.  
See note (d))

YES



the number of sheets for any of the  
following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form

Description 5

Claim(s) CP

Abstract

Drawing (s) 4 → 4

10. If you are also filing any of the following,  
state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and  
right to grant of a patent (Patents Form 7/77)

Request for preliminary examination  
and search (Patents Form 9/77)

Request for substantive examination  
(Patents Form 10/77)

Any other documents  
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature W. H. + Roy Date 5 March 2004

12. Name and daytime telephone number of  
person to contact in the United Kingdom  
Matthew P Gillard 0117 925 3030  
Fraser Johnson 01752 76 21 05

### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least six weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500 505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.



### WAVE ENERGY DEVICE

The invention relates to wave energy devices.

Wave motion in bodies of water has long been recognised as a source of renewable energy. The invention aims to provide a device for exploiting this energy resource.

According to one aspect, the invention provides a wave energy device in the form of heave-resistant vessel comprising one or more flow paths into which water can be urged by wave action and an energy extractor in fluid communication with said path(s) and arranged to extract energy from air movements in said path(s) caused by said wave action.

In a preferred embodiment, there is a plurality of flow paths, at least some of which have different lengths. In this way, flow paths can have different resonant frequencies in order to allow the device to extract energy from waves of different periodicity in an efficient manner.

The or each flow path may be in communication with the atmosphere, at some point beyond the energy extractor.

In one embodiment, there is a plurality of flow paths comprised of a group of chambers. The chambers may be uniform or dissimilar. The chambers may be polygonal, rounded or indeed circular in cross-section.

In some embodiments, the wave entrance to at least one of the flow paths is shaped to enhance the energy extraction process. Preferably, this shaping is applied to the part of the flow path that is adjacent the wave entrance of the flow path and takes the form of a smooth flaring of the flow path as it extends towards the wave entrance. Such shaping can reduce the turbulence created in water exchanged with the flow path under wave action.

In certain embodiments, two or more flow paths may combine before communicating with the energy extractor.



The heave resistance of the vessel can be achieved in various ways. For example, the vessel may be tethered under tension to, say, the sea bed. If necessary or desired, the tethering system can have sufficient elasticity to allow the vessel to rise and fall with tidal activity. As one alternative to the use of tethers, or possibly in addition to the use of tethers if necessary, the heave-resistance of the vessel may be achieved or aided by the design of the vessel. That is to say, the footprint which the vessel presents to the water or, to state it another way, the cross-sectional area occupied by the vessel in the plane of the water surface may be kept low in order to reduce an increase in buoyancy of the vessel due to water rising around the vessel from wave action. If necessary or desired, it is also possible to fit the vessel with a flotation aid.

The energy extractor is preferably turbine-based for converting the energy in the air movements into electrical energy. However, the energy extractor may be arranged to perform other types of energy conversion. For example, the energy extractor may simply convert the air movement into mechanical energy for use by some other system or the energy extractor could be arranged to convert the energy in the air movements into hydraulic energy.

By way of example only, certain embodiments of the invention will now be described with reference to the accompanying figures in which:

Figure 1 is a side elevation of a wave energy device;

Figure 2 is a simplified view of the device of Figure 1 taken from the sea bed;

Figure 3 illustrates the thickening of the chamber walls in the device of Figure 1;

Figure 4 is a schematic diagram illustrating the principle of operation of the device of Figure 1; and

Figure 5 illustrates an alternative deployment of the device shown in Figure 1.

Figure 1 illustrates a wave energy device 10 deployed in the sea and anchored to the sea bed 12 by tethers 14. The wave energy device 10 is arranged to float such that part of its structure protrudes from the surface of the water. In Figure 1, the mean sea level is indicated 16. Wave crests will protrude above the mean sea level 16 and wave troughs will dip below this level.

The main structural element of the wave energy device 10 is a group of elongate chambers that extend in parallel to one another and whose walls are structurally linked or common and thus lend rigidity to the wave energy device 10. The chambers extend vertically from the vicinity of a turbine 18 located above the water surface to differing depths below the water surface. The upper ends of the chambers are ducted into the turbine 18 and the lower ends of the chambers extend, by differing amounts, from a buoyancy jacket 20 which shrouds the group of chambers. The lower ends of the chambers protruding from the buoyancy jacket 20 are generally indicated 22 in Figure 1.

The lower ends of the chambers are open to the water. The upper ends of the chambers lead into the ducting which places the chambers in fluid communication with the turbine 18. The turbine 18 opens into the atmosphere and places the ducting, and hence the chambers, in fluid communication with the atmosphere.

In the wave energy device 10 shown in Figure 1, there are six chambers in the group. The chambers, when viewed from below towards their open ends, appear as equal segments of a hexagon, as shown in Figure 2. The six chambers have different lengths. Chamber 24 is the shortest and each successive chamber in the clockwise direction is longer than the proceeding one, the sequence terminating with chamber 26.

The wave energy device 10 is designed such that its overall density would cause it to float relative to the mean sea level 16 in the position shown in Figure 1. Moreover, the wave energy device 10 is designed so that the effect of wave action upon its buoyancy is minimised. Essentially, the advent of a wave crest at the site of the wave energy device is a temporary increase in the water level in the vicinity of the device 10. This increase produces a temporary submersion of an additional part of the volume of the device 10,

leading to an additional upward force on the device 10. The device 10 can be designed such that the amount of additional volume that is submerged by wave action is reduced to an extent sufficient to make the aforementioned additional upward force negligible relative to the weight of the device 10, therefore producing the result that wave action has little effect on the absolute vertical position of the wave energy device 10.

By way of illustration of this principle, reference can be made to Figure 3 in which the walls of the cylindrical chambers have been thickened (without changing the chambers' external cross-sectional dimensions). In Figures 2 and 3, the shaded areas represent the cross sectional area of the chambers in the plane of the mean water level 16. It will be apparent that a temporary increase in water level due to the presence of a wave crest at the device 10 would lead to a significantly larger increase in water displacement in the case of Figure 3 leading to a greater upward force in that case.

As described above, the wave energy device 10 is designed to heave (i.e. move vertically) only minimally in response to wave action. Accordingly, as a wave passes through the device 10, the water level will rise and fall in the chambers. As the water level rises in any given chamber, air will be pushed out of the chamber, through the ducting and through the turbine and into the atmosphere. When the water level falls in any given chamber, air will be drawn down into the chamber from the external atmosphere via the turbine 18 and the ducting. Therefore, the passage of waves through the device 10 leads to an exchange of air through the turbine 18. Figure 4 provides a schematic illustration of this process.

In Figure 4, only those elements of the wave energy device 10 that are necessary for understanding the passage of the air flow through the turbine are shown. For example, in Figure 4, only one of the chambers, 26, is shown and the ducting between the chamber and the turbine 18 is omitted for the sake of clarity. The turbine includes a fan with a large number of vanes. In Figure 4, the axis of rotation of this fan is indicated by the dashed line and the tips of the vanes on the half of the fan's circumference that faces towards the reader are indicated by the row of curved lines, of which 30 is an example.

As a wave crest approaches the device 10, the water level 32 within the chamber 26 rises causing air to be expelled from the chamber 26 through the turbine 18 in the direction indicated by arrow A. This causes the fan to rotate in the sense in which the vane tips shown in Figure 4, such as 30, move from right to left. When the crest of the wave has passed by, the water level 32 within the chamber 26 drops, reducing the air pressure in the space above the water in the chamber 26, causing air to be drawn into the chamber 26 through the turbine in the direction indicated by arrow B. Although this air flow is in the opposite direction to before, the fan will rotate in the same sense as before because of special shaping applied to its vanes. The chambers vent independently into the turbine 18. Thus, it is possible that one chamber could be driving the turbine 18 by drawing air down into the device whilst, at the same time, another chamber is expelling air through the turbine. However, it is possible that some chambers join or merge so that they act on the turbine in unison. The fan of the turbine 18 is mechanically coupled to a generator so that the rotational energy of the fan can be converted into electricity.

It will be apparent that the chamber 26 will resonate with a water wave of particular wavelength or period. The precise wavelength that will resonate with the chamber 26 depends upon the length of the chamber. When the chamber 26 is in resonance, the energy extraction from the chamber 26 by the turbine 18 will be at a maximum. However, water waves will, in practice, contain a spectrum of continuously varying wavelengths. To cater for this, the chambers of the wave energy device 10 each have a different length as described earlier. The provision of various chamber lengths increases the probability that at least some part of the wave energy device 10 will be operating under resonant conditions at any given time.

Figure 5 shows an alternative way of deploying the wave energy device. In Figure 5, the wave energy device 10 is provided with a positive buoyancy and it is restrained by taut tethers 14a which hold the device 10 in the position relative to the mean water level 16 that is shown in Figure 5. The tethers 14a prevent heave motion of the wave energy device and wave action causes the water level to rise and fall in the chambers as in the deployment shown in Figure 1. The tethers 14a are, to a certain extent, elastic so as to accommodate any rise or fall of the mean water level 16 due to, for example, tidal action.



1/4

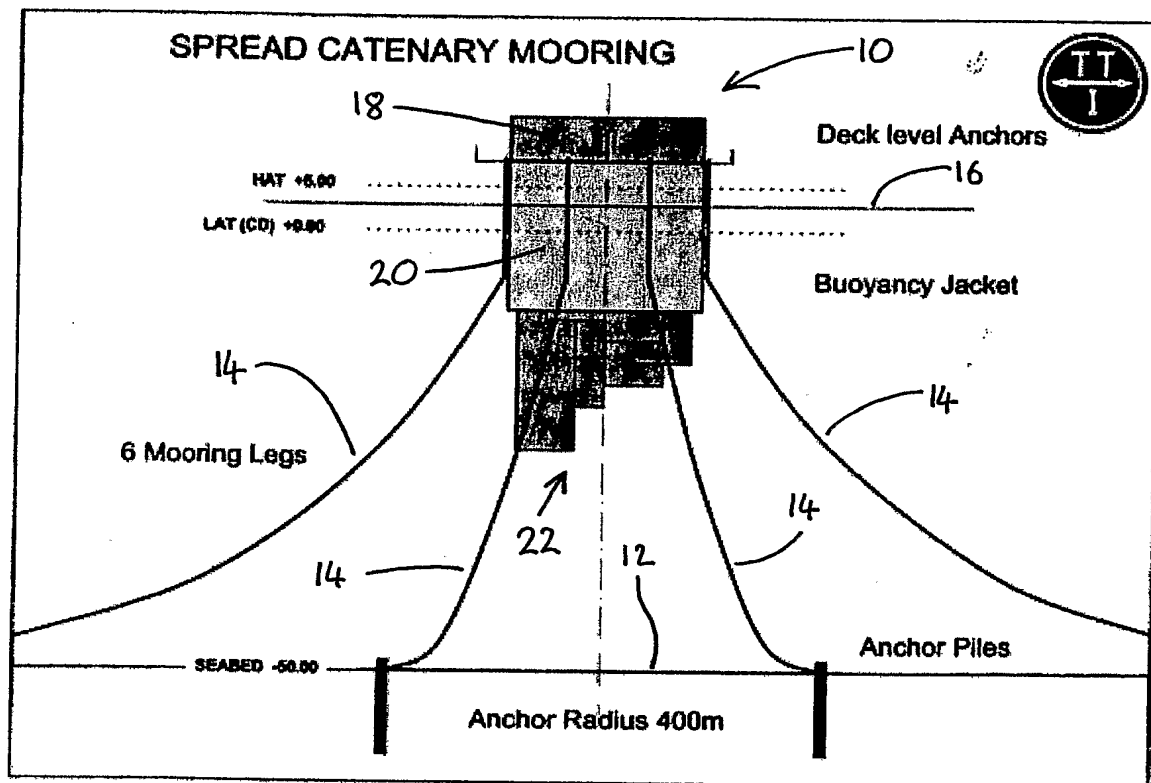


Figure 1



2/4

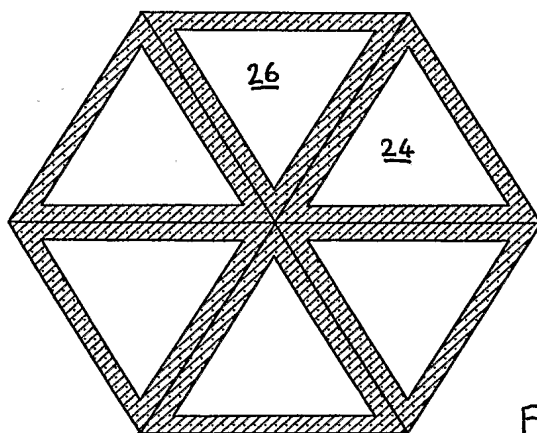


Figure 2

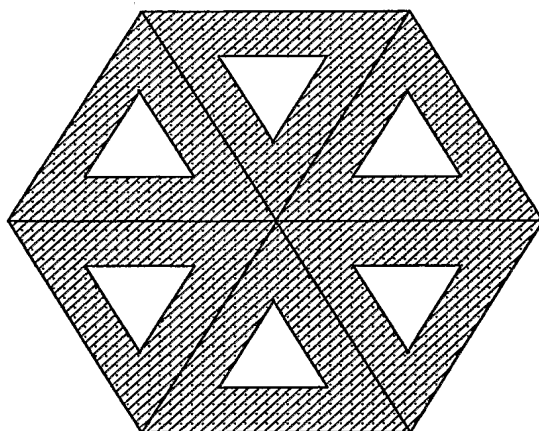


Figure 3





3/4

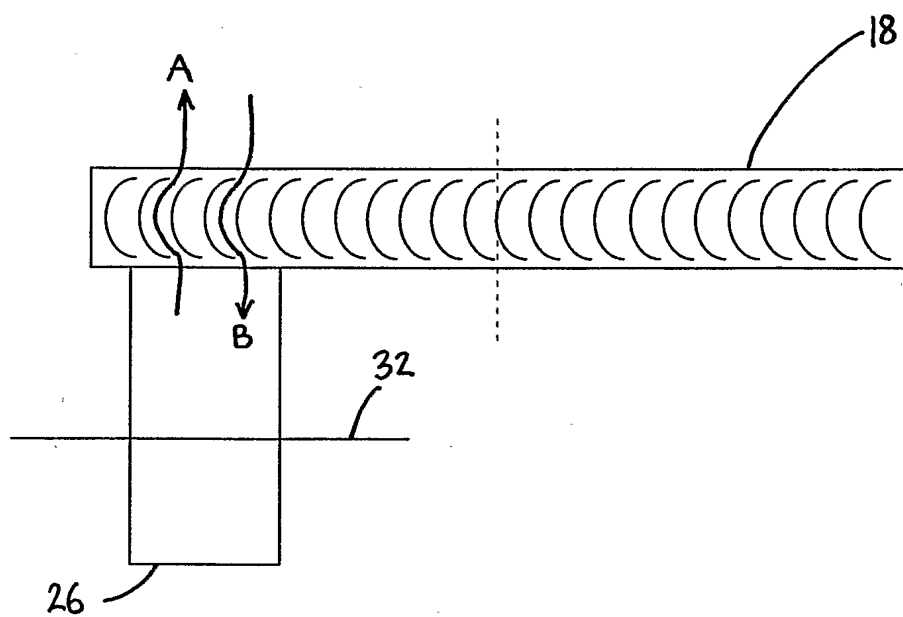


Figure 4



4/4

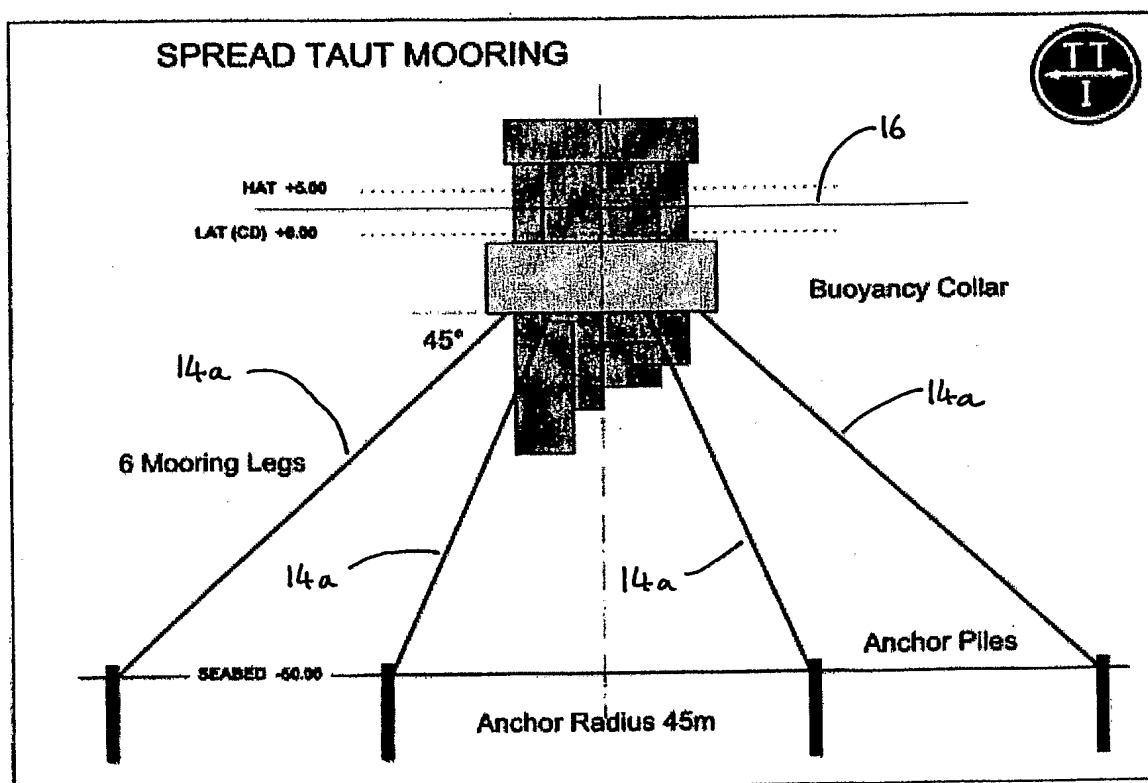


Figure 5

